

GERVASI




Round Body

Tipper for Construction Work
Half Pipe body

Round Body

Tipper for Construction Work

1. EXTRA STRENGTH OF WALLS DUE TO REINFORCING STAMPED RIBS AND WELDED UPRIGHT IN REAR PART
2. COMPLETELY ROBOTIC WELDING
3. REINFORCED FLOOR OF THE BODY

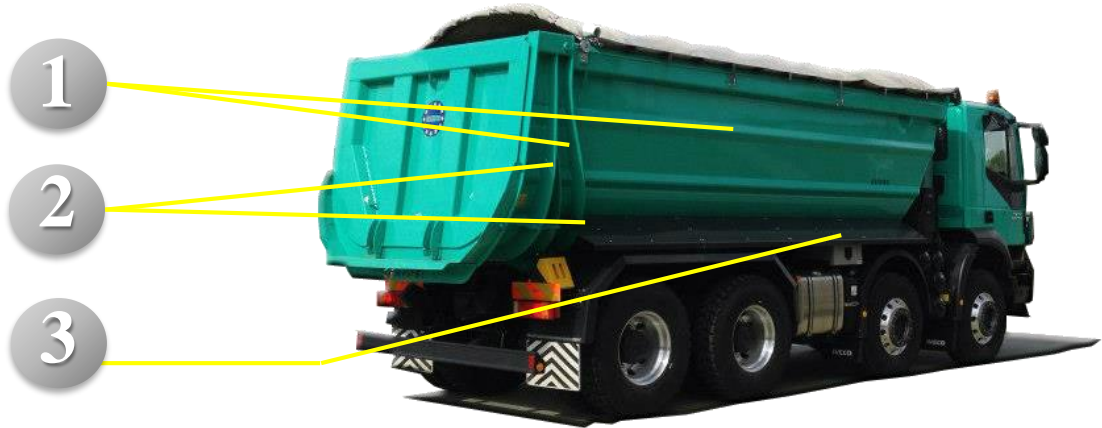

EMPLOY

- Transport of inert materials and excavation (gravel, sand, asphalt, soil, etc.)
- Round Body is available for tractors of the most important world manufacturers with 6x4 and 8x4 axle configuration.

BODY

- Steel ST52, thickness of steel: floor - 8 mm, walls - 4 mm
- Half Pipe body, Semirock type
- Side walls fixed and reinforced with stamped ribs
- Rear part reinforced by welded uprights
- Fixed front gate with protective lid and spare wheel winch
- Rear gate at mechanical automatic release
- Lifting hydraulic cylinder in front position
- Pneumatic control of tipping/ lowering of the body mounted in the cabin
- Tool box
- Rear steel mudguards
- Rear reflecting panels
- Painting cycle:
 - Sandblasting by means of computerized system;
 - Application of acrylic primer and finishing water enamel in Your color RAL

OPTIONS

- Floor and walls from anti wear steel HB450
- Rear asphalt extension for finisher
- Manual or electric tarpaulin in PVC
- Automatic «gull wings» rear gate
- Parking wedges with holders
- Side protection
- Galvanized junction box for heating of the body
- Lateral clearance lights
- Adhesive reflective tapes

*Technical characteristics	BODY VOLUME / m ³			
	14	16	18	20
Configuration / Wheelbase, mm	6x4/ 3500 MM		8x4/ 4250 MM	
Superstructure weight, kg	3650	3750	4000	4080
Body weight, kg	2600	2700	2900	2980
Body lifting angle	50°			
Length of superstructure, mm	6300		6740	
External body length, mm	6250		6715	
Internal body length, mm	5100		5530	
Internal Height of walls, mm	1300	1450	1500	1640
Overall width, mm	2500			

**All measurements and weights are approximate. They are subject to change without notice for production purposes.
Gervasi*