

**GERVASI**



# Rock SUNRISE


Tipper for Mining industry

Ideal for rocks transporting

# SUNRISE

Tipper for Mining

1. EXTRA STRENGTH OF WALLS DUE TO WELDED UPRIGHTS
2. COMPLETELY ROBOTIC WELDING
3. REINFORCED FLOOR OF THE BODY

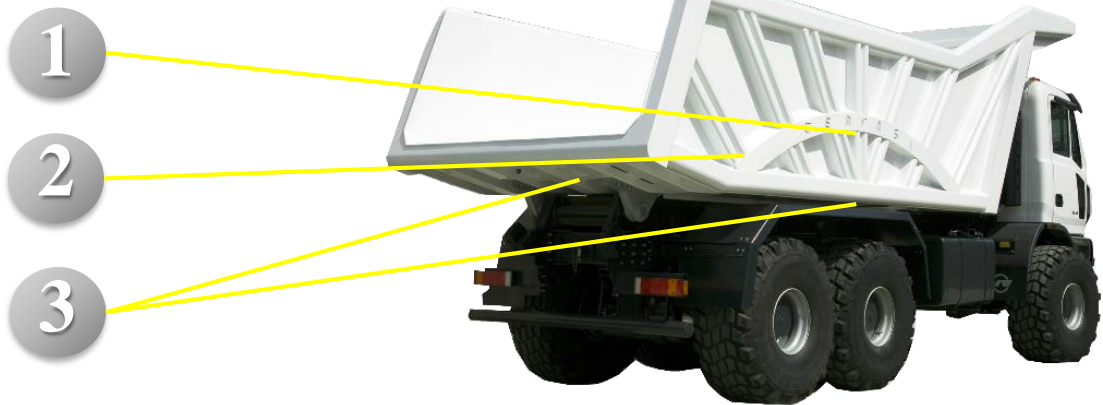

## EMPLOY

- Transport of rocks
- SUNRISE model is available for tractors of the most important world manufacturers with 6x4 and 8x4 axle configuration.

## BODY

- Steel HB450, thickness of steel: floor - 10 mm, walls - 8 mm
- Sunrise body type
- Floor tilted upward at rear about 12°
- Side walls fixed, with reinforced uprights fashioned and welded continuously
- Without rear gate
- Front board with extra long cab protection lid and spare wheel winch
- Lifting hydraulic cylinder in front position
- Pneumatic control of tipping/ lowering of the body mounted in the cabin
- Tool box
- Rear mudguards
- Body support
- Side protection bar
- Painting cycle:
  - Sandblasting by means of computerized system;
  - Application of acrylic primer and finishing water enamel in Your color RAL

## OPTIONS

- Steel HB450, thickness of steel: floor - 12 mm, walls - 10 mm
- Rear gate
- Parking wedges with holders
- Lateral clearance lights
- Adhesive reflecting strips and reflecting panels

*Technical characteristics	BODY VOLUME / m <sup>3</sup>		
	14	17	20
Configuration / Wheelbase, mm	6x4/ 3500 MM		8x4/ 4250 MM
Superstructure weight, kg	6250	6450	6960
Body weight, kg	5200	5400	5800
Body lifting angle	50°		
Length of superstructure, mm	6270		6670
External body length, mm	7110		7510
Internal body length, mm	5295	5245	5635
Internal Height of walls, mm	1215	1455	1565
Overall width, mm	2510		

*\*All measurements and weights are approximate. They are subject to change without notice for production purposes.  
Gervasi*